


### Selected operating point


Heat source	Water-Ambient Generator Power					
	T <sub>in</sub> (°C)					
	170	126	124	123	121	119
	<b>150</b>	119	116	114	111	<b>108</b>
	130	117	107	97	89	80
	110	108	97	86	78	71
	90	83	75	66	-	-
	T <sub>amb</sub> (°C)	5	12,5	20	27,5	<b>35</b>

Useful heat / Disipation

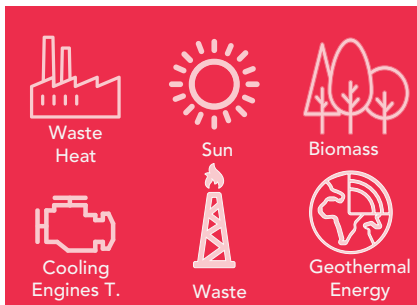


> Heat source

Heat transfer fluid	Agua
Inlet temperature	150 °C
Outlet temperature	130 °C
Volumetric flow rate	45 m <sup>3</sup> /h
Thermal power	1.000 kWt
Pressure drop	100 kPa

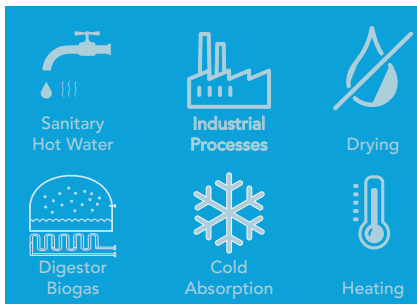

< Useful heat Disipation

Heat transfer fluid	Ambiente
Ambient temperature	35 °C
Air condenser	14 kWe
Relative Humidity	50 %
Thermal power	781 kWt




< Electricity

Gross power	108 kWe
Voltage	3x400 V
Frequency	50 Hz
Intensity	173 A



## Dimensions


### Basic Option

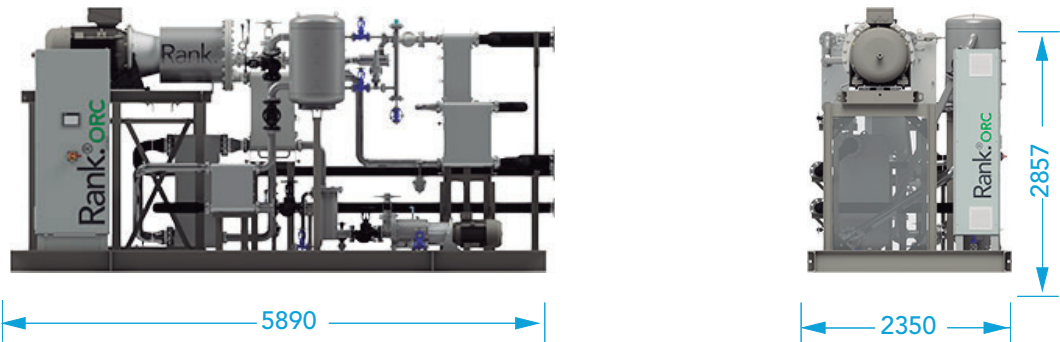


### Wrap-around Option



### Container Option

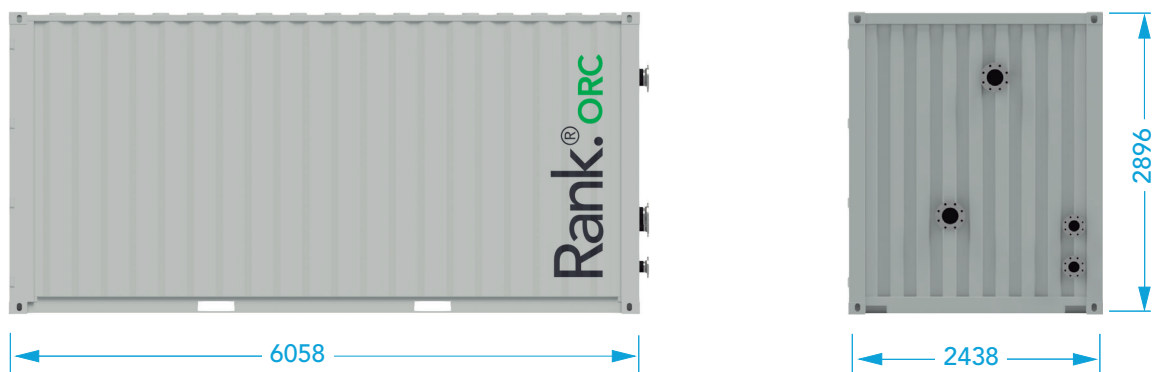

### Container Option + aero condenser

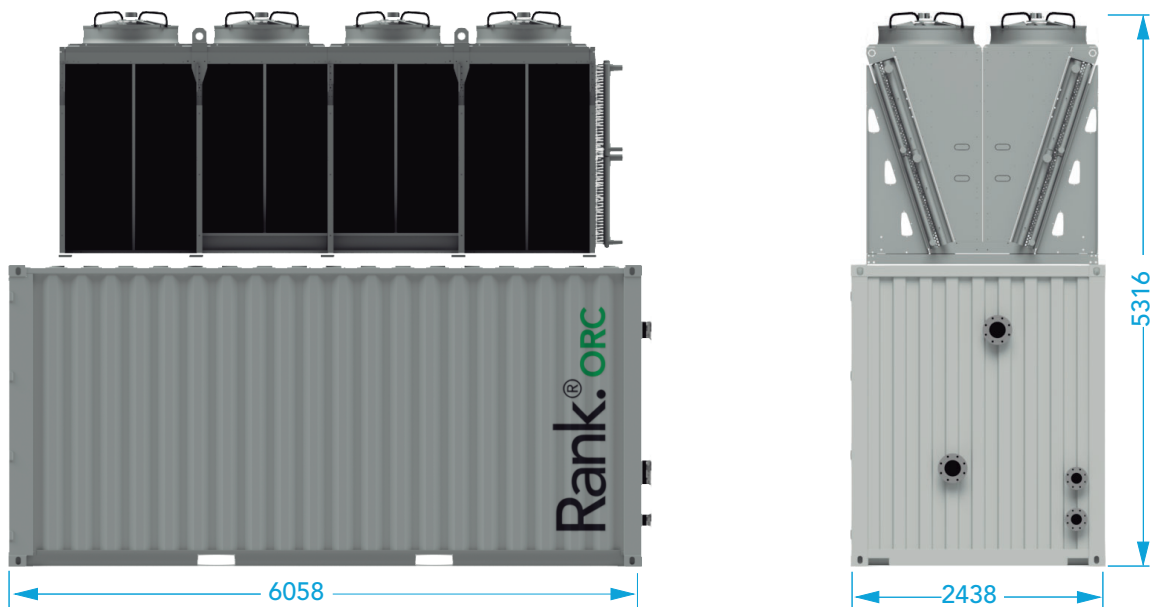

## Compliance with regulations and standards

- Low voltage Directive
- Machinery Directive
- Electromagnetic Compatibility Directive
- Pressurized Equipment Directive
- EN/ISO 3744:2010
- UNE EN 10216
- UNE EN 764-7
- UNE EN 13136:2014+A1
- 2006/42/CE
- 2014/68/UE
- ASME B31.1 / ASME B31.3 – Process Piping Code
- ASME Boiler and Pressure Vessel Code Section VIII
- UL 508A- Control Panel Wiring
- 2014/35/UE
- 2014/30/UE