

# Rank.<sup>®</sup> HTC1

## Product description

Rank<sup>®</sup> HTC1 machine is specially designed for cogeneration applications with high-temperature thermal needs, and they can produce useful heat as hot water at 80°C.

In addition, by using heat at temperatures between 180 °C and 210 °C, this high-efficiency machine can produce 45 kWe



## A Rank<sup>®</sup> machine for every need

Whatever your need is, we have a Rank<sup>®</sup> machine that can be adapted to it, through a variety of products that cover a wide range of thermal and power applications.

LT1	MT1	HT1	<b>HTC1</b>	
LT2	MT2	HT2	HTC2	
LT3	MT3	HT3	HTC3	
LT4	MT4	HT4		
90°C	120°C	150°C	180°C	210°C

## What is Rank<sup>®</sup>?

The Rank<sup>®</sup> equipment allows electrical energy and useful heat production using a low-temperature heat source, with economic and environmental benefits.



# Rank® HTC1


## Applications

Among the main applications of the Rank® ORC machines, we highlight the waste heat recovery and the use of renewable heat sources, with a special interest in cogeneration and trigeneration systems.

### Heat sources



Industrial Waste Heat



Engines



Biomass



Solar CHP



Waste



Geothermal

### Heat sinks



Cold Production



Heating




Industrial Processes



Drying

## How does it work?

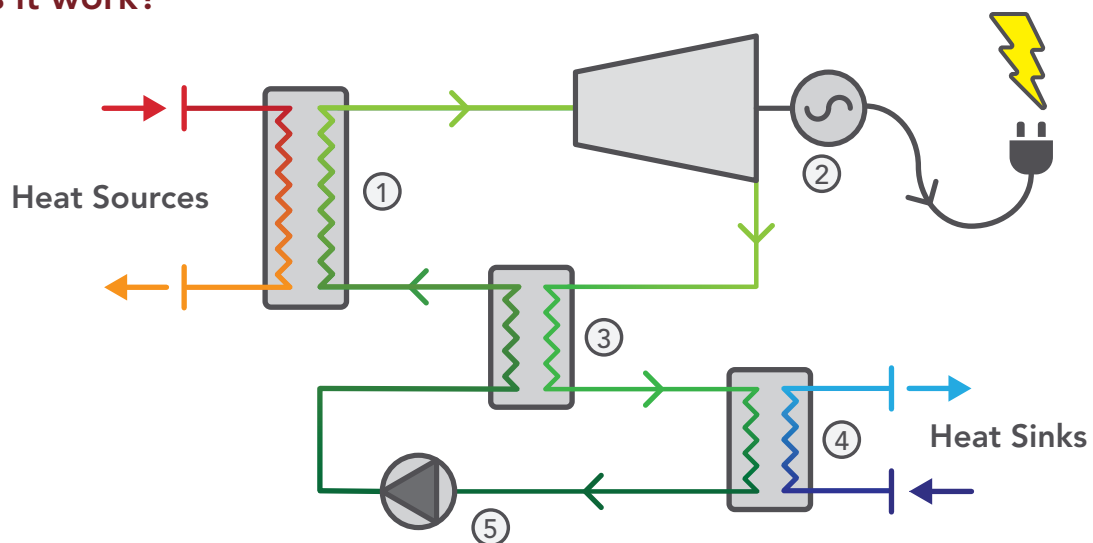

- ① Evaporator** A heat exchanger provides heat to the high-pressure working fluid and passes from subcooled liquid to superheated vapor (in the form of water or thermal oil).
- ② Turbine** The expansion of the superheated vapor is used to generate clean electricity.
- ③ Regenerator** The expanded working fluid is used to preheat the high-pressure liquid at the inlet of the evaporator To increase the efficiency of the system.
- ④ Condenser** It produces useful heat (in the form of water) from the condensation of the working fluid at low pressure.
- ⑤ Pump** The pressure of the working fluid is increased, and the ORC cycle is completed.

# Rank® HTC1


## Rank® Technology

The Rank® equipment is composed of high quality, robust and efficient components, which offer our customers the following advantages and benefits.




### Rank® low-rpm turbine

Operation at low revolutions reduces the noise level, lengthens the service life, and improves reliability.

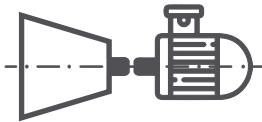

### Rank® direct drive

Direct drive avoids the use of gears or pulleys, minimising the maintenance and increasing electrical efficiency.

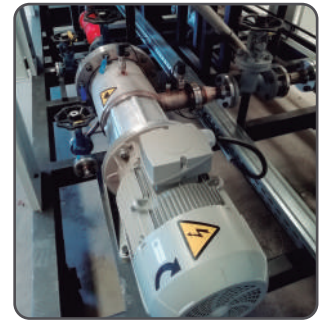

### Zero leaks

Our hermetic components eliminate the leakage of the working fluid, reducing maintenance costs and downtime and being more environmentally friendly.



### Magnetic transmission

Magnetic transmission to ensure tightness and to reduce the possibility of leakage.



### Rank® easy-connect

Electronics-free connection to the electricity grid at the required electrical quality conditions.



### Flexible operation

Modular machines that can operate under a wide range of temperature and flow inlet and outlet conditions.



### Digitalisation through the Rank® control system

Our machines operate without the need for the human interface through an automatic, efficient managing system.



### Safety

It complies with all safety regulations and minimises the risk of accidents.



### Rank® service







Real-time remote monitoring and predictive control of the machines and automatically generated reports.

## Safety Regulations and Standards

- Low voltage Directive
- Machinery Directive
- Electromagnetic Compatibility Directive
- Pressurized Equipment Directive
- ENA ER G59/3
- ASME B31.1 – Power Piping Code, Mechanical
- ASME B31.3 – Process Piping Code
- ASME Boiler and Pressure Vessel Code Section VIII
- UL 508A- Control Panel Wiring
- EN/ISO 3744:2010
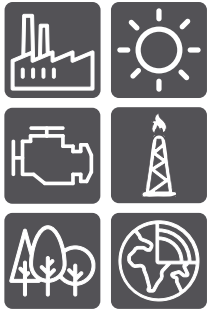
# Rank<sup>®</sup> HTC1



## Technical Data

		Heat source	Heat transfer fluid *	Thermal Oil	-
			Inlet temperature	180-210	°C
			Outlet temperature	120-150	°C
			Volumetric flow rate	13	m <sup>3</sup> /h
			Thermal power	300-500	kWt
			Connections diameter	DN80 PN16	-
			Pressure drop	50	kPa
			Heat transfer fluid inner volume	45	L
		Useful heat	Heat transfer fluid	Water	-
			Inlet temperature	45-65	°C
			Outlet temperature	60-80	°C
			Volumetric flow rate	19	m <sup>3</sup> /h
			Thermal power	200-350	kWt
			Connections diameter	DN80 PN16	-
			Pressure drop	100	kPa
			Heat transfer fluid inner volume	60	L
		Electricity	Gross power	25-45	kWe
			Net power	20-35	kWe
			Voltage	3 x 400	V
			Frequency	50	Hz
			Intensity	82	A
			Container transport (optional)	HC 20'	

\* The heat transfer fluid can be water, steam, or thermal oil

HC (high cube)

## Dimensions

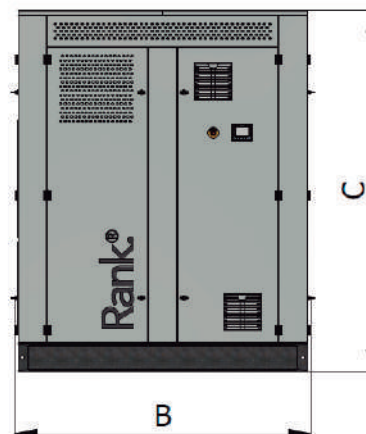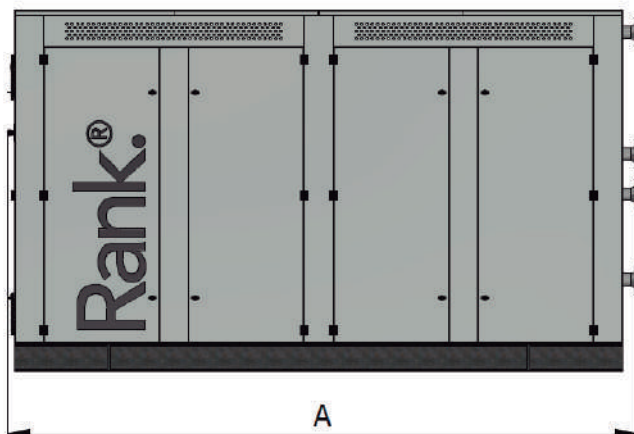

A = 4 400 mm  
 B = 2 050 mm  
 C = 2 500 mm  
 Weight 5 500 kg

**Rank<sup>®</sup>** Rank ORC, s.l.  
 Plaza la Paz, 2  
 12600 La Vall d'Uixó  
 Castelló, España  
 Tel. +34 964 696 859  
 sales@rank-orc.com  
 www.rank-orc.com

Although our staff has made every effort possible to ensure accurate data and close to the final solution, these should be considered indicative and not binding.